

CELL300

- Designed for 60-63.5mm (2 3/8"-2 1/2") diameter tubes
- Precision extruded high tensile aluminium alloy
- DGUV17/BGV C1 rating
- Compatible with M950 / 4GS-91
- Supplied with M12 bolt & wingnut
- Mounting hole for up to 13mm (1/2") bolts
- Polished surface with micro-percussion markings
- Powder coated versions available on request
- Rated with SF 8:1 (kg) DGUV17/BGV C1 (SWL1)
- Rated with SF 4:1 (kg) 2006/42/EC (SWL2)



CELL301

Basic clamp

	SWL1	SWL2	Weight	Tube Ø
kg (lbs)	650 (1433)	1300 (2865)	0.65 (1.43)	60-63.5 mm (2.36"-2.5")

Basic Clamp can be used for most applications.



CELL302

Clamp with bolt and wingnut

	SWL1	SWL2	Weight	Tube Ø
kg (lbs)	650 (1433)	1300 (2865)	0.75 (1.65)	60-63.5 mm (2.36"-2.5")

Clamp supplied with M12 x 35 bolt and wingnut.



CELL303

Clamp with lifting eye

	SWL1	SWL2	Weight	Tube Ø
kg (lbs)	650 (1433)	1300 (2865)	1.00 (2.20)	60-63.5 mm (2.36"-2.5")

Clamp supplied with steel eye for for attachment of rope or cable.
Version with SWL 340 kg (750 lbs) silver lifting eye available




CELL304

Swivel coupler

	SWL1	SWL2	Weight	Tube Ø
kg (lbs)	650 (1433)	1300 (2865)	1.50 (3.30)	60-63.5 mm (2.36"-2.5")

Set of two clamps free to rotate 360° for connection of two tubes.

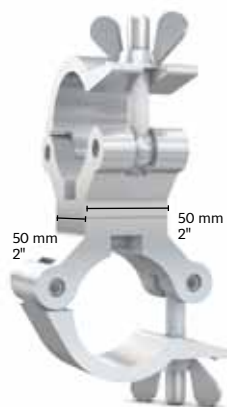

CELL305

90° fixed coupler

	SWL1	SWL2	Weight	Tube Ø
kg lbs	650 (1433)	1300 (2865)	1.50 (3.30)	60-63.5 mm (2.36"-2.5")

Set of two clamps fixed at 90° to each other for connection of two tubes.



CELL306

Parallel coupler

	SWL1	SWL2	Weight	Tube Ø
kg lbs	650 (1433)	1300 (2865)	1.50 (3.30)	60-63.5 mm (2.36"-2.5")

Set of two clamps fixed parallel to each other for connection of two tubes.

