
LSG3 LED screen structures

- Large format MT Tower LED Screen Support solution
- Various system options available to suit specific screen size & weight
- Self-climbing towers (MT1 / MT2 / MT3) with electric or manual hoists
- Rear base frame & diagonal stabiliser to provide obstruction-free viewing

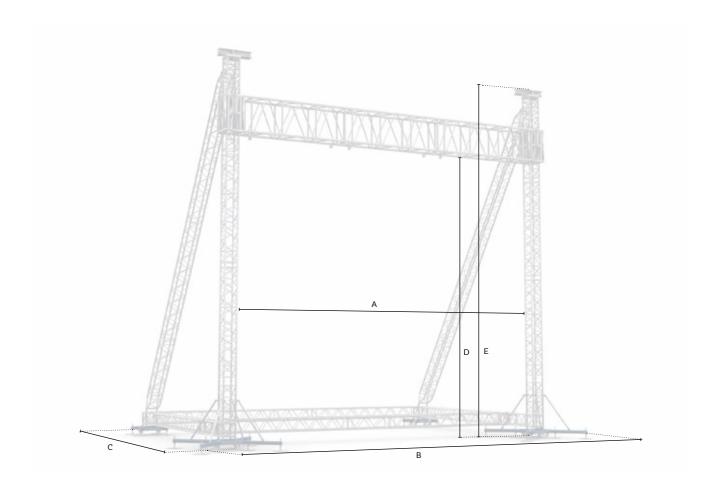

Technical specifications


		LED screen size >	10x6 m (32.80x19.70 ft)	8x6 m 26.30x19.70 ft
Dimensions	Α	Internal width	11.36 (37.26)	9.36 (30.71)
	В	Overall external width	13.99 (45.89)	11.99 (39.34)
	С	Overall external depth	8.38 (27.49)	8.38 (27.49)
	D	Clearance	8.50 (27.88)	8.31 (27.27)
	Е	Overall height	10.56 (34.64)	10.56 (34.65)

Loading capacity

		LED screen size >	10x6 m (32.80x19.70 ft)	8x6 m (26.30x19.70 ft)
Loading capacity	LED Screen	6x point loads equally divided	400 kg (882 lbs)	500 kg (1101 lbs)
		4x point loads equally divided	800 kg (1764 lbs)	1000 kg (2203 lbs)
		Max. total load	3200 kg (7056 lbs)	4000 kg (8811 lbs)
	* See structural report for exact load positioning			

132 LSG3



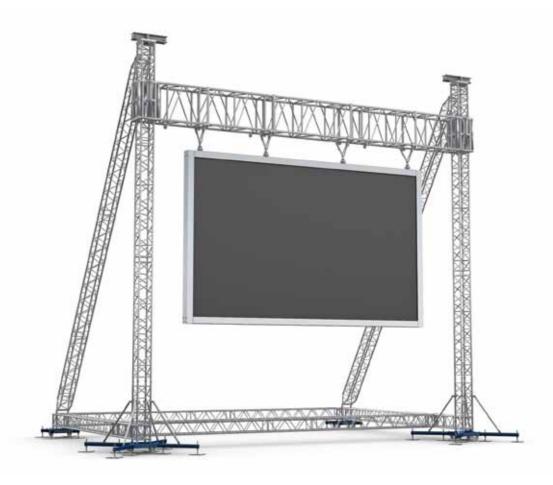

Operational Specifications

	DIN EN 13814 (2005)	Fairground and amusement park machinery and structures			
Design standards	DIN 1055-4	Actions on structures / wind			
	DIN 4113	Design of aluminium structures			
	DIN 18800	Design of steel structures			
	• All of our structures are produced under EN 1090 EXC2 as standard and include the necessary guy wires, instruction manual and engineering report				
Wind management	Max. wind speed incl. screen	28m/s - 100km/h - 62mph (Max. basic wind speed)			
	* Screen to be stabilised against swinging by cross truss at bottom of screen				
Ballast	4x 1400kg / 3808lbs at the end of each outrigger * Figure based on screwjack to timber spreader to rubber to concrete / asphalt				
Customized	Customisation, i.e. truss configuration, alternative dimensions, upon request				
Always verify your screen dimensions, weight and rigging with MILOS					

Transpoting data

	LED screen size >	10x6 m (32.80x19.70 ft)	8x6 m (26.30x19.70 ft)
Self-weight	* Exact self-weight depends on configuration	2400 kg (5291 lbs)	1858 kg 4093 lbs)
Transport volume	* Packed in carton boxes and bubble foil	15 m³ (530 ft³)	12 m³ (424 ft³)