


# M760

- High-capacity M760 series truss range
- Super-sized conical connections for maximum rigidity
- User-friendly tapered pin holes for ease of assembly
- Great free-span & loading characteristics (up to 32m/ 104,98 ft)
- Connection kit supplied with every truss length & junction
- Compatible with 200/400/500/600 series cell clamps
- Powder coat colour finish available on request

## RECT

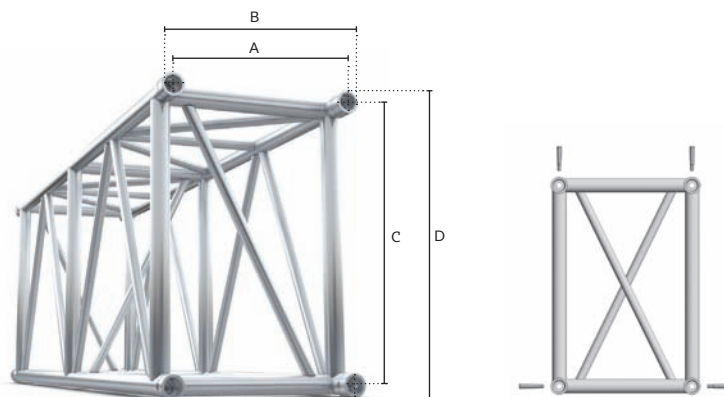

### M760

|     | Main Chords   | Diagonals        | Horizontal Braces | Alloy           | A           | B           | C           | D           | Coupler |
|-----|---------------|------------------|-------------------|-----------------|-------------|-------------|-------------|-------------|---------|
| RTP | 50x4 (2x0.16) | 30x3 (1.18x0.12) | 50x4 (2x0.16)     | EN - AW 6082 T6 | 470 (18.50) | 529 (20.83) | 712 (28.03) | 762 (30.00) | CCO     |

### M760 RTP RECT

LOADING CHART


| Span                             | m (ft)   | 8.00 (26.25)      | 10.00 (32.81)     | 12.00 (39.37)     | 14.00 (45.93)     | 16.00 (52.49)     | 18.00 (59.06)     |
|----------------------------------|----------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Centre Point Load (CPL)          | kg (lbs) | 3238.20 (7139.00) | 2557.50 (5638.32) | 2097.60 (4624.41) | 1763.90 (3888.73) | 1509.00 (3326.77) | 1306.70 (2880.78) |
| Deflection                       | mm (in)  | 17.00 (0.67)      | 26.70 (1.05)      | 38.70 (1.52)      | 53.00 (2.09)      | 69.80 (2.75)      | 89.10 (3.51)      |
| Third Point Load (TPL)           | kg (lbs) | 2121.50 (4677.10) | 1918.20 (4228.90) | 1573.20 (3468.31) | 1322.90 (2916.49) | 1131.80 (2495.19) | 980.00 (2160.53)  |
| Deflection                       | mm (in)  | 18.90 (0.74)      | 33.80 (1.33)      | 48.70 (1.92)      | 66.40 (2.61)      | 86.80 (3.42)      | 110.10 (4.33)     |
| Quarter Point Load (QPL)         | kg (lbs) | 1414.30 (3117.99) | 1278.80 (2819.27) | 1048.80 (2312.21) | 882.00 (1944.47)  | 754.50 (1663.39)  | 653.30 (1440.28)  |
| Deflection                       | mm (in)  | 17.60 (0.69)      | 31.50 (1.24)      | 45.40 (1.79)      | 62.00 (2.44)      | 81.30 (3.20)      | 103.30 (4.07)     |
| Fifth Point Load (FPL)           | kg (lbs) | 1060.80 (2338.66) | 1051.60 (2318.38) | 874.00 (1926.84)  | 735.00 (1620.40)  | 628.80 (1386.27)  | 544.50 (1200.42)  |
| Deflection                       | mm (in)  | 16.80 (0.66)      | 32.90 (1.30)      | 48.00 (1.89)      | 65.50 (2.58)      | 85.70 (3.37)      | 108.80 (4.28)     |
| Uniformly Distributed Load (UDL) | kg (lbs) | 530.40 (356.41)   | 420.60 (282.63)   | 347.50 (233.51)   | 252.00 (169.34)   | 188.60 (126.73)   | 145.20 (97.57)    |
| Deflection                       | mm (in)  | 14.00 (0.55)      | 27.40 (1.08)      | 47.40 (1.87)      | 65.00 (2.56)      | 85.10 (3.35)      | 108.00 (4.25)     |

| Span                             | 20.00 (65.62)     | 22.00 (72.18)     | 24.00 (78.74)    | 26.00 (85.30)    | 28.00 (91.86)    | 30.00 (98.43)    | 32.00 (104.98)   |
|----------------------------------|-------------------|-------------------|------------------|------------------|------------------|------------------|------------------|
| Centre Point Load (CPL)          | 1141.20 (2515.91) | 1002.40 (2209.91) | 883.70 (1948.22) | 780.40 (1720.49) | 689.30 (1519.64) | 607.90 (1340.19) | 534.30 (1177.93) |
| Deflection                       | 111.00 (4.37)     | 135.80 (5.35)     | 163.50 (6.44)    | 194.30 (7.65)    | 228.30 (8.99)    | 265.80 (10.46)   | 306.90 (12.08)   |
| Third Point Load (TPL)           | 855.90 (1886.93)  | 751.80 (1657.43)  | 662.80 (1461.22) | 585.30 (1290.36) | 517.00 (1139.79) | 455.90 (1005.09) | 400.70 (883.39)  |
| Deflection                       | 136.20 (5.36)     | 165.30 (6.51)     | 197.20 (7.76)    | 232.20 (9.14)    | 270.10 (10.63)   | 311.10 (12.25)   | 355.30 (13.99)   |
| Quarter Point Load (QPL)         | 570.60 (1257.96)  | 501.20 (1104.96)  | 441.80 (974.00)  | 390.20 (860.24)  | 344.60 (759.71)  | 303.90 (669.98)  | 267.20 (589.08)  |
| Deflection                       | 128.10 (5.04)     | 155.70 (6.13)     | 186.30 (7.33)    | 219.80 (8.65)    | 256.50 (10.10)   | 296.40 (11.67)   | 339.60 (13.37)   |
| Fifth Point Load (FPL)           | 475.50 (1048.30)  | 417.70 (920.87)   | 368.20 (811.74)  | 325.20 (716.94)  | 287.20 (633.17)  | 253.30 (558.43)  | 222.60 (490.75)  |
| Deflection                       | 134.60 (5.30)     | 163.40 (6.43)     | 195.10 (7.68)    | 229.70 (9.04)    | 267.40 (10.53)   | 308.20 (12.13)   | 352.20 (13.87)   |
| Uniformly Distributed Load (UDL) | 114.10 (76.67)    | 91.10 (61.22)     | 73.60 (49.46)    | 60.00 (40.32)    | 49.20 (33.06)    | 40.50 (27.21)    | 33.40 (73.63)    |
| Deflection                       | 133.70 (5.26)     | 162.30 (6.39)     | 193.90 (7.63)    | 228.40 (8.99)    | 265.90 (10.47)   | 306.60 (12.07)   | 350.40 (13.80)   |

### STANDARD LENGTHS AND WEIGHTS AVAILABLE

|      | m (ft)   | 1.00 (3.28)   | 1.50 (4.92)  | 2.00 (6.56)   | 2.50 (8.20)   | 3.00 (9.84)    | 3.50 (11.48)   | 4.00 (13.12)  |
|------|----------|---------------|--------------|---------------|---------------|----------------|----------------|---------------|
| RECT | kg (lbs) | 22.60 (49.89) | 33.30 (73.5) | 37.10 (81.84) | 47.80 (105.4) | 51.50 (113.65) | 62.20 (137.22) | 65.90 (145.4) |

Connection material (pins/clips/couplers) and packaging are not included in above weights

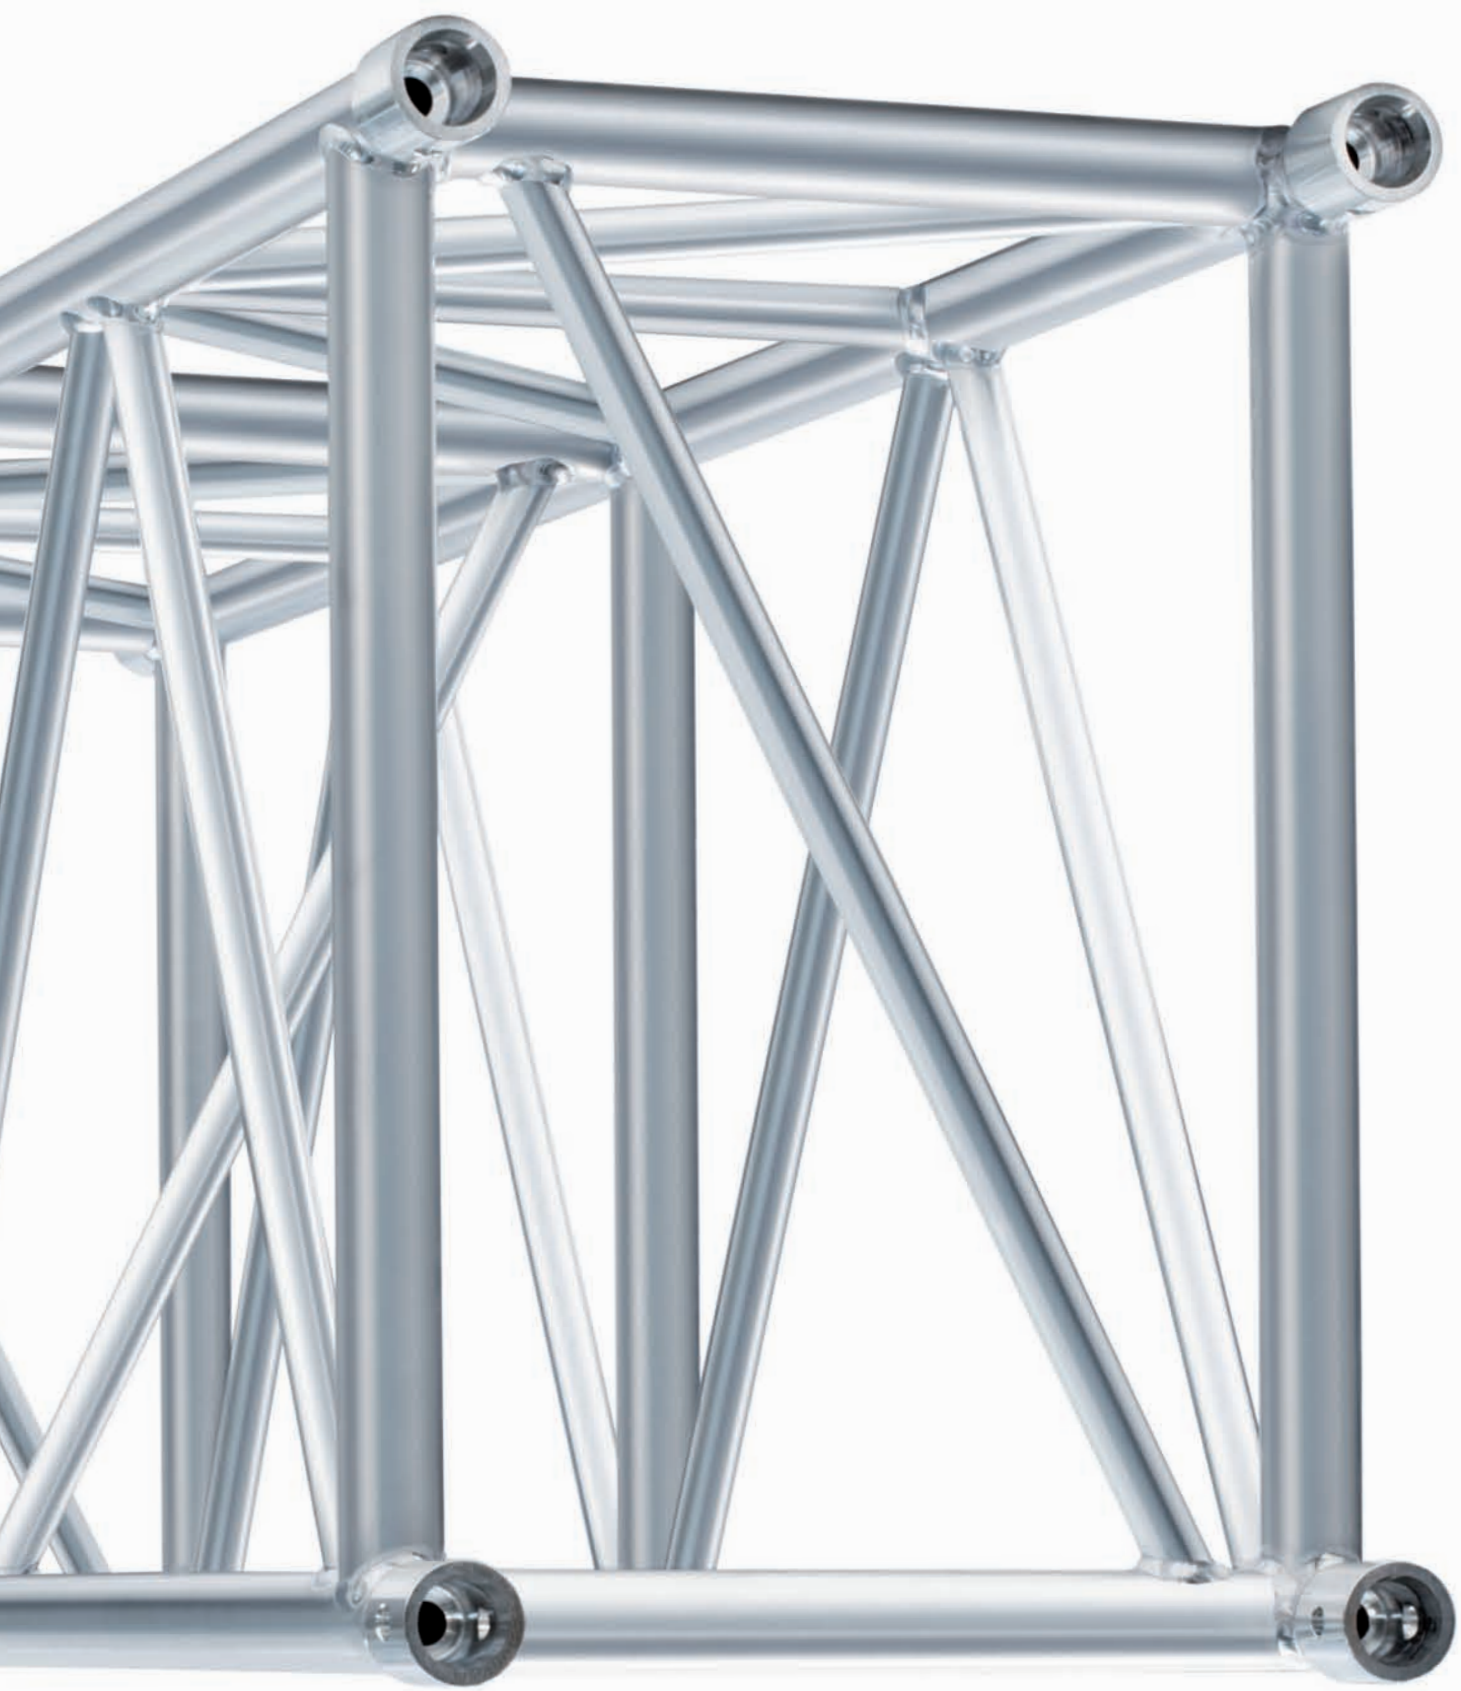

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                       |                                                                                                                         |                                                                                                                        |                                                                                                                                   |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| <p>CPL<br/>(Centre Point Load)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <p>TPL<br/>(Third Point Load)</p>  | <p>QPL<br/>(Quarter Point Load)</p>  | <p>FPL<br/>(Fifth Point Load)</p>  | <p>UDL<br/>(Uniformly Distributed Load)</p>  |
| <p>All truss loading calculations are based on:<br/>                     Truss supported or suspended at both ends • Static loadings only • Loads applied in the node points • Self-weight of the truss is included in all listed load capacities • Spans made of different truss lengths • Interaction of bending moment and shear force at connector is considered • Structural analysis based on EN 1999 • All loading data should be multiplied by 0.85 to comply with BS 7905-2 and ANSI E1.2-2006 • For any other application, or in case of an assembled structure, contact Milos or a structural engineer • Safety factors used: self-weight 1.35 / variable loads 1.5</p> |                                                                                                                       |                                                                                                                         |                                                                                                                        |                                                                                                                                   |