



OV110 foldable ramps

- Convenient folding mechanism
- Anti-slip surface
- Loading capacity up to 725 kg (1595 lbs)
- Robust EN-AW 6063 T6 aluminium profile
- Length up to 3000mm (118.11")
- Wide selection of sizes
- Ideal for concert touring
- Optional side rails available

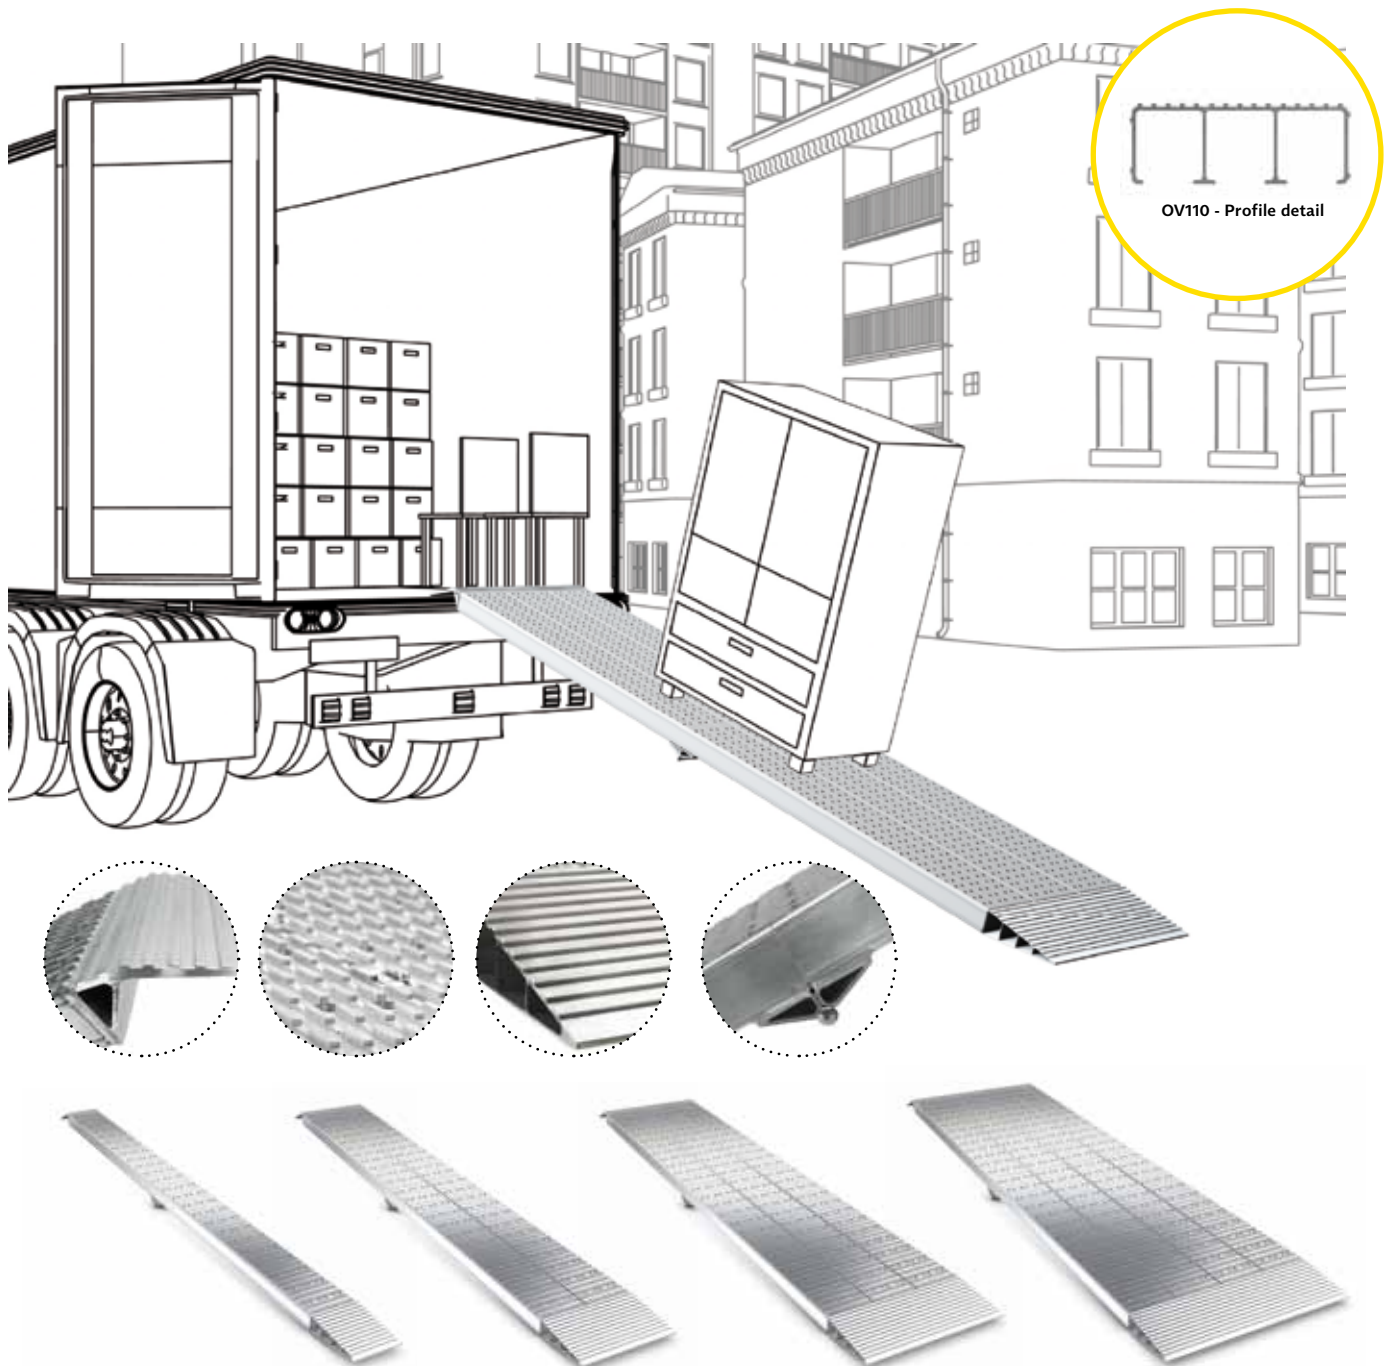


OV110

Foldable loading ramps
Available in 200 - 400 - 600 - 800mm (7.87 - 15.75 - 23.62 - 31.50').

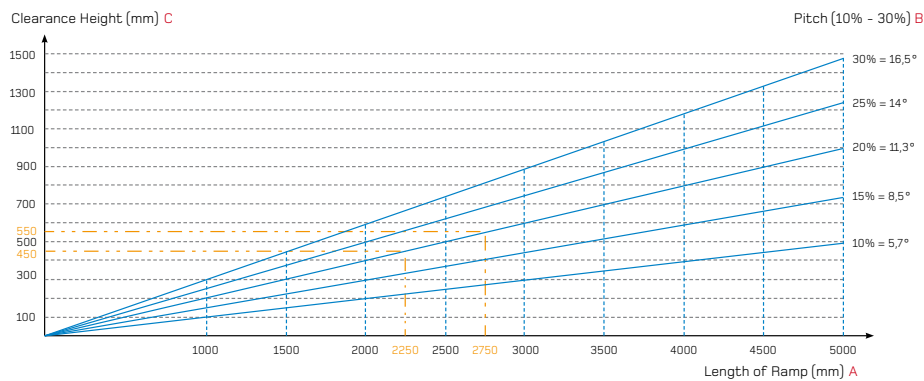

$$\text{Length of Ramp (mm) A} = \frac{\text{Clearance Height (mm) C}}{\text{Pitch (10\% - 30\%) B}} \times 100$$

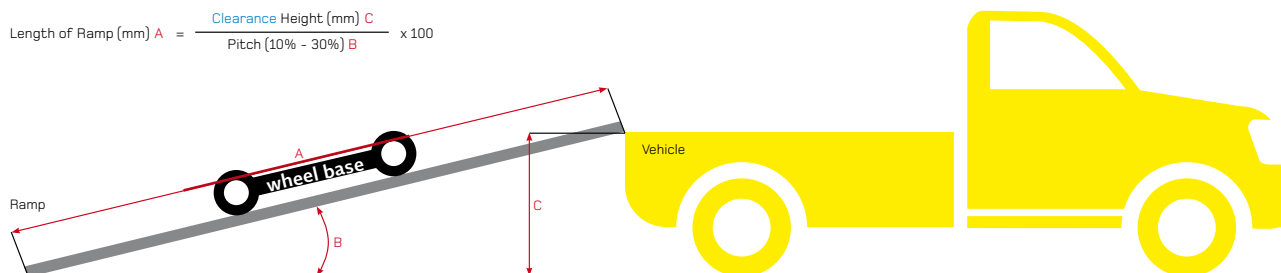

OV110 Foldable loading ramp

Technical specifications

Code
OV110-200x2000
OV110-200x2500
OV110-200x3000
OV110-400x2000
OV110-400x2500
OV110-400x3000
OV110-600x2000
OV110-600x2500
OV110-600x3000
OV110-800x2000
OV110-800x2500
OV110-800x3000

mm in

Length		Width		Height		SWL pair piece*		Weight per ramp	
mm	(in)	mm	(in)	mm	(in)	kg	(lbs)	kg	(lbs)
2000	(78.74)	200	(7.87)	600	(23.62)	333.50	(733.70)	10.00	(22)
2500	(98.43)	200	(7.87)	750	(29.53)	266.50	(586.30)	12.00	(26.40)
3000	(118.11)	200	(7.87)	900	(35.43)	200	(440.00)	14.00	(30.80)
2000	(78.74)	400	(15.75)	600	(23.62)	650	(1430.00)	20.00	(44)
2500	(98.43)	400	(15.75)	750	(29.53)	500	(1100.00)	24.00	(52.80)
3000	(118.11)	400	(15.75)	900	(35.43)	400	(880.00)	29.00	(63.80)
2000	(78.74)	600	(23.62)	600	(23.62)	725	(1595.50)	30.00	(66)
2500	(98.43)	600	(23.62)	750	(29.53)	675	(1485.00)	36.00	(79.20)
3000	(118.11)	600	(23.62)	900	(35.43)	600	(1320.00)	43.00	(94.60)
2000	(78.74)	800	(31.50)	600	(23.62)	725	(1595.50)	40.00	(88.00)
2500	(98.43)	800	(31.50)	750	(29.53)	675	(1485.00)	49.00	(107.80)
3000	(118.11)	800	(31.50)	900	(35.43)	600	(1320.00)	57.00	(125.40)

*SWL calculated for 500mm wheelbase